

DMXPen Pro – ArtNet Recording Quick Manual

ArtNet RECORDING

DMXPen Pro is able to record both DMX and ArtNet signal. Follow the next steps to learn how perform an ArtNet recording session



ArtNet Recording

ArtNet REC - Step 1

Use PenSuite software to select DMXPen Pro working mode and data direction. PenSuite software is provided on the on board microSD card or downloadable for free from www.dmxpen.com web site.

N.B. Remember to stop any running playback pressing the on board button before to start a recording session




a. Install PenSuite software on your PC


ArtNet REC - Step 2

The DMXPen Pro connection to PC can be established in two different way:

1. Direct connection using cross cable



2. Through HUB/Switch connection using patch cable

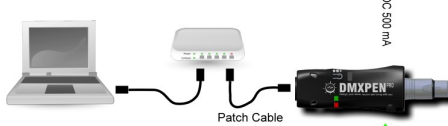

b. Connect DMXPen Pro to PC and power on

ArtNet REC - Step 3

Once installed, launch PenSuite. Remember that Firewall system can cause incorrect operation.



c. PenSuite start up

ArtNet REC - Step 4

1. Press "Find Node" to scan the network looking for connected devices
2. Select the desired DMXPen from the node list
3. Press on DMXPen icon to select the data direction and working mode (ArtNet to DMX in this case)



d. DMXPen network scan and mode selection

ArtNet REC - step 5



- e. insert microSD card
- f. connect network cable
- g. power DMXPEN
- h. be sure that multifunction led light steady blue

DMXPEN Pro – ArtNet Recording Quick Manual

